

義大利電磁式膜片泵浦 PB-MA





MULTI-FEATURE FOOT-MOUNTED PUMPS

- Foot-mounted solenoid-driven diaphragm metering pumps with **black color (anti-UV 抗紫外線)**.
- Innovated features such as twin-scale flow control knobs, combined pump (雙刻度)
- **IP65** enclosure protection.
- Approximate weights of 3.4 to 5.0 kg.
- 262 mm (depth), 130 mm (width), 220.5 mm (height).
- Manufactured in accordance with **CE** regulations.

Type	Max Flow	Max Press.	Max imp./min.	Output /Stroke	Stroke	Suction height	Standard power	Power cons.	Current cons.	Net weight
	l/h	bar		ml	mm	m	Volts/Hz	Watts	Ampere	kg
2-10	2	10	120	0.28	0.8	2	230V/50-60Hz	35	0.15	3.4
5-7	5	7	120	0.7	1.4	2	230V/50-60Hz	35	0.15	3.4
5-10	5	10	120	0.7	1.8	2	230V/50-60Hz	55	0.25	4.4
10-10	10	10	120	1.4	1.1	2	230V/50-60Hz	67	0.25	5.4

※ Pumps supplied with manual air bleed valve

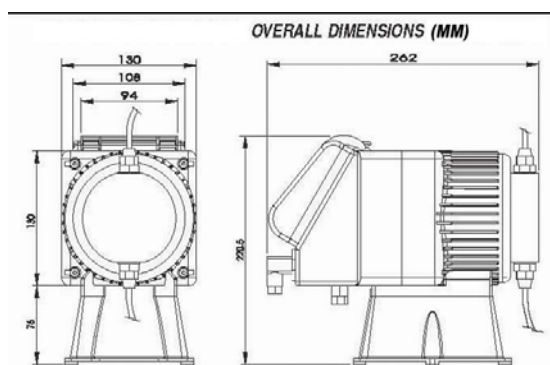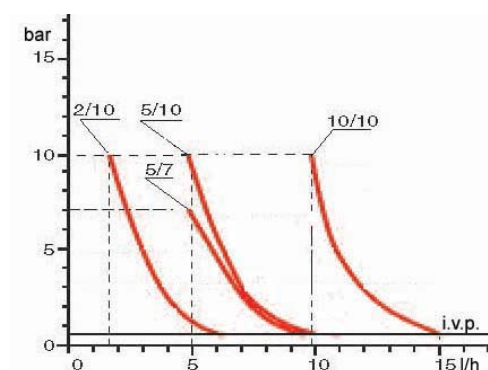


Max metering pump flow variation in relation to working pressure in the plant; the diagrams also includes injection valve losses I.V.P.

FEATURES	Electicals	230V/50-60Hz/1Ph
	Body/casing (non-wetted)	Glass-reinforced PP.
	Pumphead assembly	PP
	Check valves	Viton (lip type)
	Diaphragm	Entirely PTFE
	Seals	Viton
	Suction/discharge tube (2m)	PVC/PP
	Filter (footvalve) & injection valve	PP (3/8" BSPm)

CONTROL PANEL (操作面盤)

Output can be controlled manually by setting the pump impulse rate by means a potentiometer.

- Impulse adjustable from 0 to 100%
- A frequency switch reduces of 1/5 scale of the flow potentiometer consequently the number of injections per minute for accurate control of low output

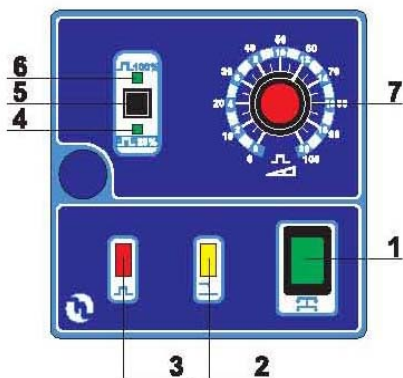

CONTROL PANEL

- 1 - ON/OFF lightning switch
- 2 - Level alarm LED
- 3 - Pulse frequency LED
- 4 - 20% flow scale read out
- 5 - Twin scale adjustment: 0-100% • 0-20%
- 6 - 100% flow scale read out
- 7 - Flow rate adjustment

1. ON/OFF lightning switch
電源開關指示燈
2. Level alarm LED
液位警示(選購)
3. Pulse frequency LED
衝程頻率顯示
4. 20% flow scale read out
低流量操作顯示
5. Twin scale adjustment:
0-100% • 0-20%
流量雙刻度選擇鈕
6. 100% flow scale read out
高流量操作顯示
7. Flow rate adjustment
衝程流量設定

本泵浦特點:

1. 本泵浦接液部分皆為耐酸鹼材質，特適合各場合使用。
2. Teflon (鐵弗龍)膜片，耐用操作準確。
3. 操作面盤 PC 構造，耐候耐腐蝕。
4. IP-65 及 CE 認證，安全可靠。
5. 經濟實惠好用。

益水水處理工程有限公司

10079 台北市泉州街 18-1 號 2 樓

Tel : 886-2-2301-5146, 2307-6570

Fax : 886-2-2303-0895

E-Mail : taihon.engg@msa.hinet.net