

A SLICK WAY TO MAINTAIN YOUR FIFTH WHEEL

Fifth Wheel Lubricant



Permatex® Fifth Wheel Lubricant conveniently packaged for efficient no mess, no waste application!

Keeping a fifth wheel well lubricated isn't just a matter of good vehicle maintenance; it's a matter of ensuring safe operation for trailer drivers and other motorists. Many state law enforcement agencies currently fine truck drivers for either not having a sufficient amount of grease on the fifth wheel or for having too much grease, both conditions creating a potential hazard for other drivers.

Permatex offers a convenient way of dispensing lubricant to the wheel plate. Our Fifth Wheel Lubricant is packaged in handy premeasured 2 oz. pouches, making it easy for no mess, no waste application. This heavy-duty waterproof lubricant contains graphite and molybdenum disulfide for maximum lubricity. In addition, anti-rust and corrosion inhibitors produce a product that will outlast any conventional lubricant. Formulated to withstand the harsh environments that a fifth wheel encounters, the high solid content forms a plating action, giving this lubricant the higher load carrying capabilities that a fifth wheel needs.

Permatex®

Fifth Wheel Lubricant

Permatex® Fifth Wheel Lubricant

HOW IT WORKS: Place a pouch on each side of the kingpin or fifth wheel plate before coupling the trailer to the tractor. As the wheel plate engages the trailer, the single-use pouches rupture, releasing the premeasured dose of lubricant. The plates rotate on each other when the truck moves and the pouches disintegrate, leaving only the lubricant with no mess or waste dripping onto the truck or road.

PRODUCT BENEFITS

- Easy and convenient to use
- No tools required for use
- Creates no mess dispensing
- Waterproof
- Long lasting
- Withstands extreme pressure
- Corrosion protection

TYPICAL APPLICATIONS

- All heavy duty fifth wheel top plates
- Fifth wheel top plates on light and medium duty trucks
- King pins
- Fifth wheel slides
- Axle slides
- Trailer balls




FOR CLEAN UP (IF REQUIRED)

1. Wipe off excess material with a dry paper towel.
2. Clean hands with Permatex hand cleaner or soap and water.
3. The product contains graphite and molybdenum disulfide which may require several washings to remove.

DIRECTIONS

1. **DO NOT REMOVE LUBRICANT FROM POUCH.**
For maximum lubrication, place one pouch on each side of the fifth wheel plate near the base.
2. OR, Place one pouch on each side of the king pin on trailer as previous lubrication will hold the pouch in place.

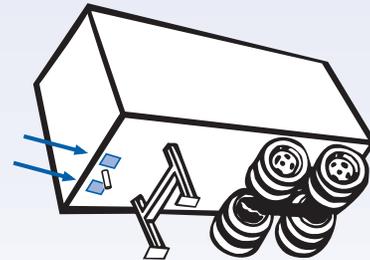

3. When the fifth wheel plate engages the trailer, the pouch ruptures to release the lubricant.
4. The lubricant filled pouch disintegrates as these plates rotate on each other while distributing the lubricant evenly over the fifth wheel.
5. There is no environmental waste.

ORDERING INFORMATION

| ITEM # | DESCRIPTION | BOX PER CASE | CASE DIMENSIONS | CASE CUBE | GROSS WT. LBS. | ITEM UPC PREFIX |
|--------|--|--------------|------------------------------|-----------|----------------|-----------------|
| 01010 | PERMATEX® Fifth Wheel Lubricant, 60pk display carton | 4 | 17.5" L x 13.875" W x 9.5" H | 1.335 | 34 | 01010 0 |
| 01020 | PERMATEX® Fifth Wheel Lubricant, 350pk bulk carton | 1 | 22.5" L x 16.250" W x 7.0" H | 1.481 | 47.4 | 01020 9 |

For technical information or a distributor near you, call toll-free 1-87-PERMATEX (877-376-2839) or visit www.permatex.com



Hartford Square North
10 Columbus Boulevard
Hartford, Connecticut 06106

Permatex and Design are trademarks of Illinois Tool Works Inc. Copyright © 2009 Permatex, an Illinois Tool Works company. All rights reserved. 0908-150 / PX-0093B